




# JCC-DN7123DW

Indoor PTZ Speed Dome with Wall-mount Bracket

## Features

- 1/4" Sony Super HAD CCD
- 3.8~87.4 mm with 23X optical and 10X digital zoom to give a total of 230X zoom
- High performance picture control of with advanced DSP
- 0.03 Lux ( ICR on )
- IR Cut Removable
- Posi. / Nega / Freeze / Cross line / Mask motion detect / H & V reverse
- Pan range 360°, Speed 0.5~240°/s
- Tilt range 90°, Speed 0.5~120°/s
- 128 Preset positions
- NTSC or PAL system

Dimension:

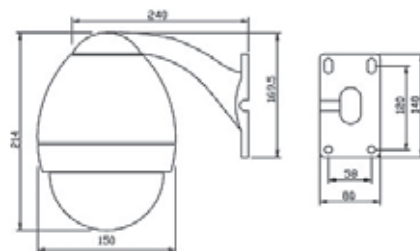

## Specification

<b>Model</b>	JCC-DN7123DW
<b>Pick Up Element</b>	1/4" Sony super HAD CCD
<b>Zoom Camera Module</b>	23x Zoom Camera
<b>Picture Element</b>	NTSC: 768(H) x 494(V) / PAL: 752(H) x 582(V)
<b>Synchronization</b>	Internal / External (AC-Lock) +/- 1Hz
<b>Resolution</b>	Horizontal 480 TV Lines
<b>Min. illumination</b>	0.03 Lux
<b>Lens</b>	F1.6(W)~1.9(T) / f= 3.7(W)~87.4(T) mm
<b>Zoom</b>	23X Optical Zoom and 10X Digital Zoom (The Total Zoom Ratio 230X)
<b>AGC</b>	Auto Gain Control (+24dB Max.)
<b>ALC</b>	On / Off
<b>BLC</b>	Super BLC, 48 Zone BLC
<b>White Balance Range</b>	3200°K~9600°K
<b>Position</b>	128 Preset Positions (Max)
<b>Picture Effect</b>	Posi./ Nega/ Freeze/ Cross line/ Mask Motion Detect/ H&V Reverse
<b>Pan</b>	Pan Range 360°, Speed 0.5~240 °/s
<b>Tilt</b>	Tilt Range 90°, Speed 0.5~120 °/s
<b>Auto Cruising</b>	1 Auto Cruising Tours(Max)
<b>Power Source</b>	DC12V +/- 1.0V , 3.6 W (Max)
<b>Operation Temperature</b>	-10°C~50°C
<b>Operation Humidity</b>	Within 85% RH

## Optional Parts



Ceiling-mount Bracket